


TB0034 Hendrickson Ride Height Valve

Date: 31 October 2005

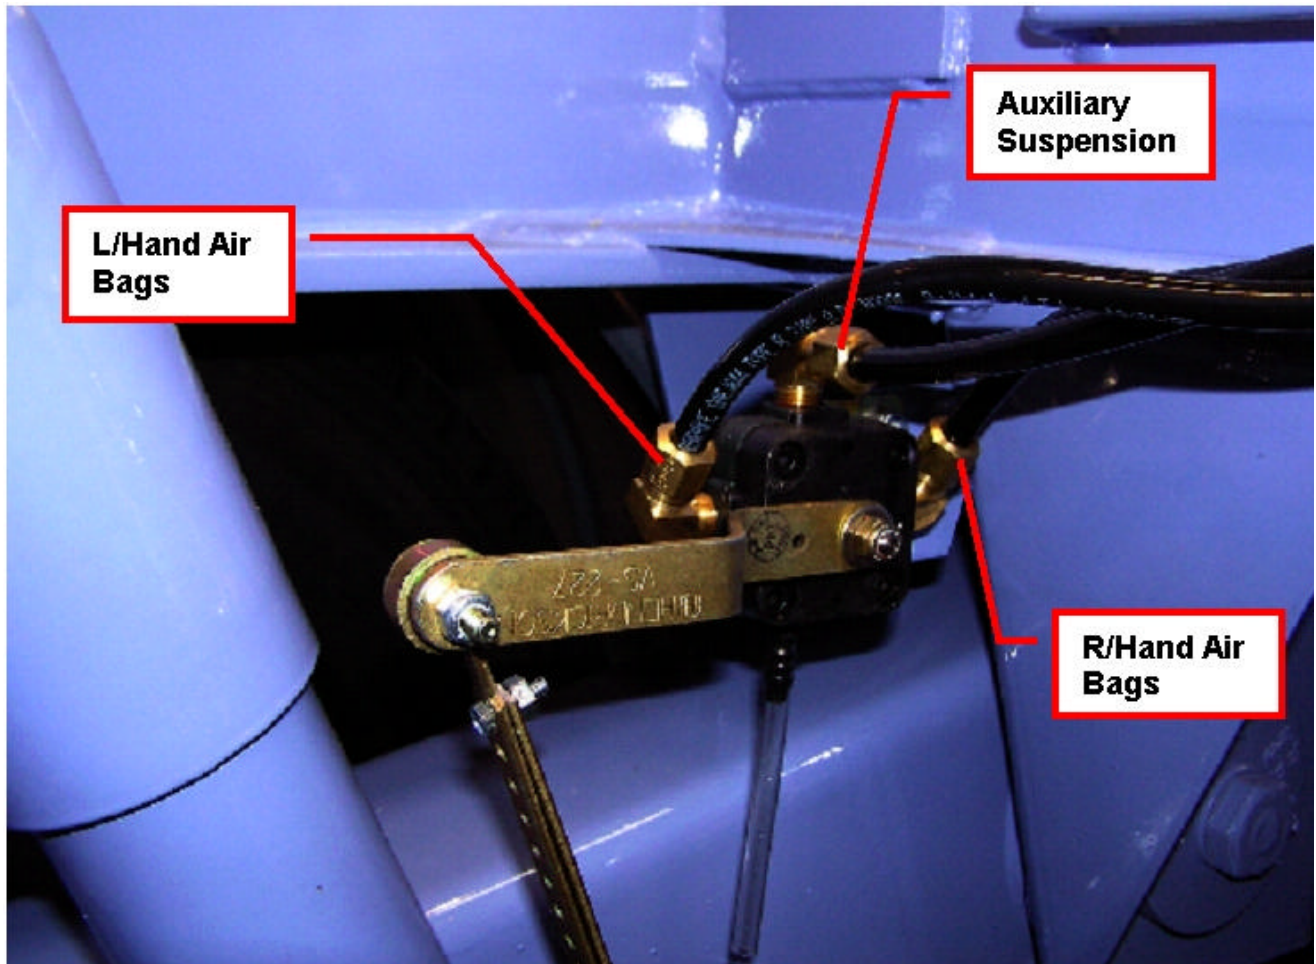

Shown above is the preferred plumbing of the ride height valve.

This method utilises the valve as the connection between right and left air bags and improves roll stability and reaction response.

An additional mounting plate may be required to allow the fitting of the additional elbow, this can be fabricated from 40x40x6 Aluminium angle.

Always check the ride height linkage can not go over centre at maximum and minimum range of suspension travel.